
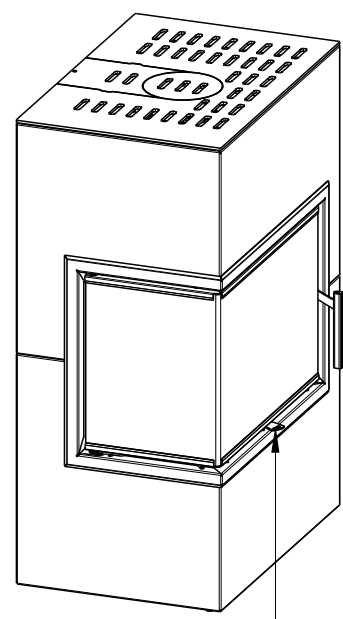
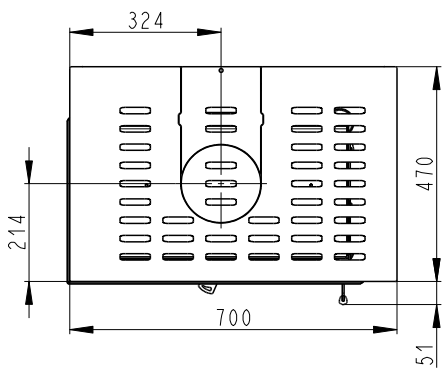


VARIANT L/R 03

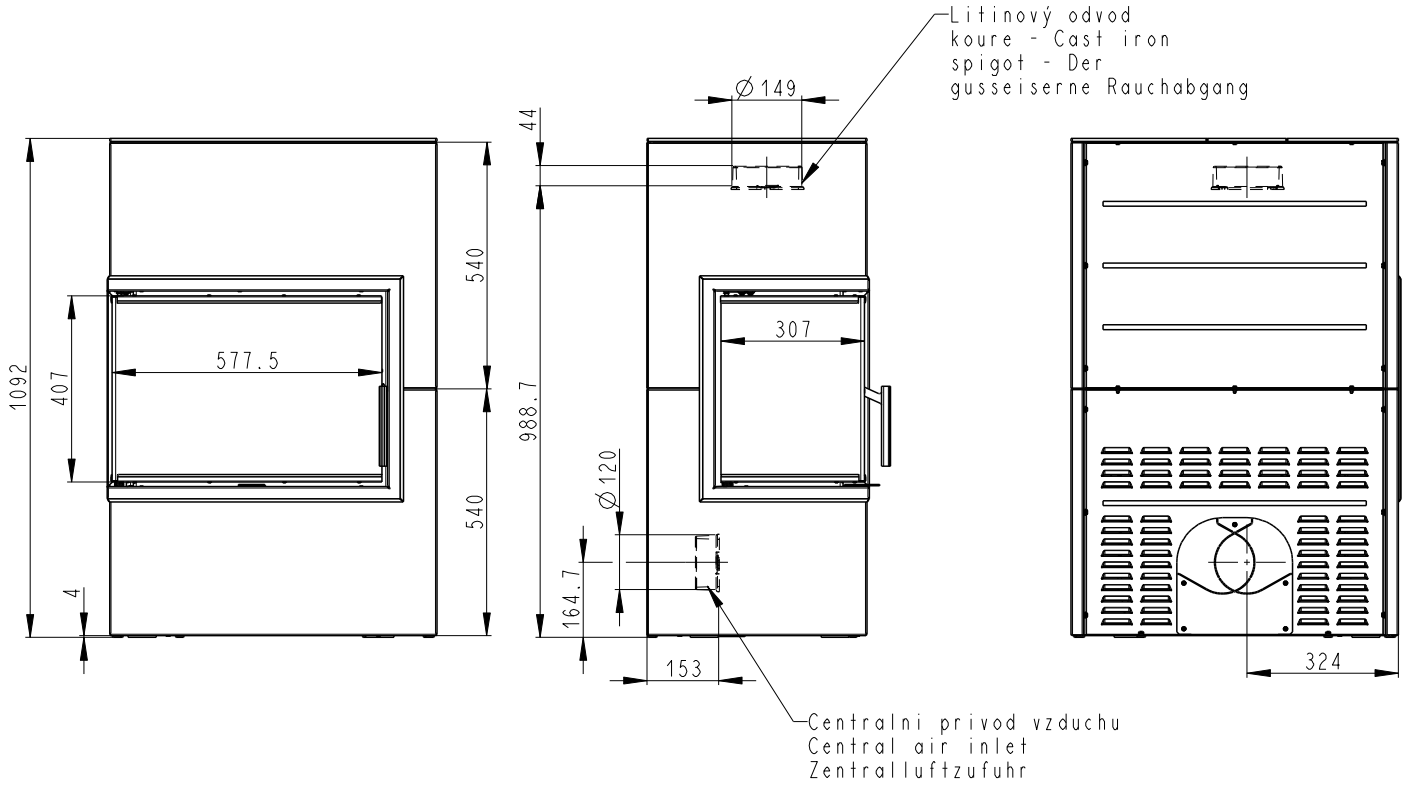

Primarni a sekundarni vzduch
Primärluft und Sekundärluft
Primary and secondary air

Artikl	VARIANT L/R 03
--------	----------------

General data

Nominal heat output	kW	5,7
Efficiency	%	85,73
Mass of the test fuel fired hourly	kg/h	1,63
Dry flue gases mass flow	g/s	4,4
Mean flue gas temperature	°C	213
Flue draught	Pa	11
Weight	kg	170
CO ₂	%	10,57
Dust O ₂ =13%	mg/m ³	11
CO O ₂ =13%	mg/m ³	940

Recommended values

Reg.output	kW	2,9 - 7,5
Max. mass of the test fuel fired hourly	kg/h	3,0
Flue gas connector diameter	mm	150

Meets requirement limit values for

EN 13 240	•
BImSch V 1	•
BImSch V 2	•
DIN plus	•
15a B-VG	•

Supplied accessories

Holder with magnet	•
Ashtray	•